



# Motorola XOOM 2 Media Edition Touch Screen Replacement

Replace broken or malfunctioning touch screen to bring device back to working order.

Written By: Lacie Broten



## INTRODUCTION

Do you have a cracked, shattered, or unresponsive touch screen? This guide will help you replace your screen! You will need to purchase a new screen before beginning.

---



### TOOLS:

- [iFixit Opening Tools](#) (1)
  - [T3 Torx Screwdriver](#) (1)
  - [T4 Torx Screwdriver](#) (1)
-

## Step 1 — Motorola XOOM 2 Media Edition Disassembly





**i** Power off the device before beginning disassembly.

- Remove six 2.7mm Torx #3 screws.



## Step 2

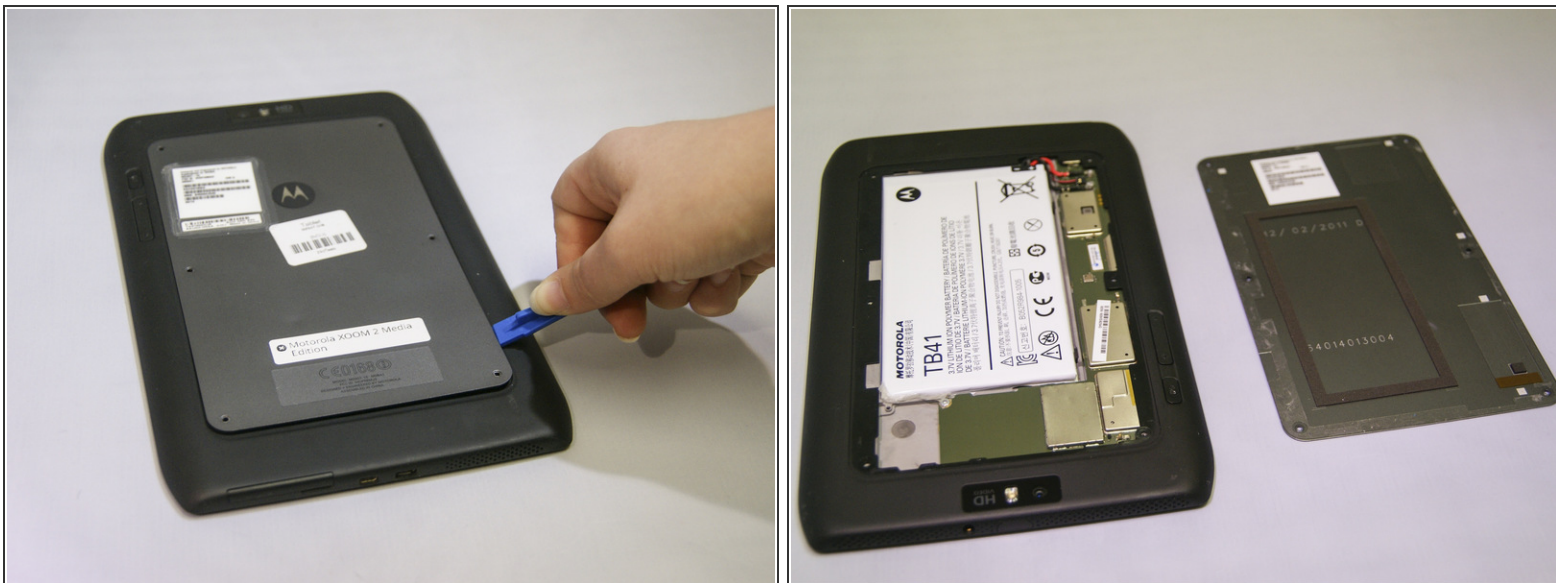

 There is adhesive attached to the underside of the back panel. Gradually lift the panel to avoid bending it out of shape.



- Pry off the back panel using a plastic opening tool.
- Using a plastic opening tool, slide the tool gently around the back cover to lift the cover off.

## Step 3




- Pry off the black cover gradually using a plastic opening tool.

## Step 4 — Touch Screen

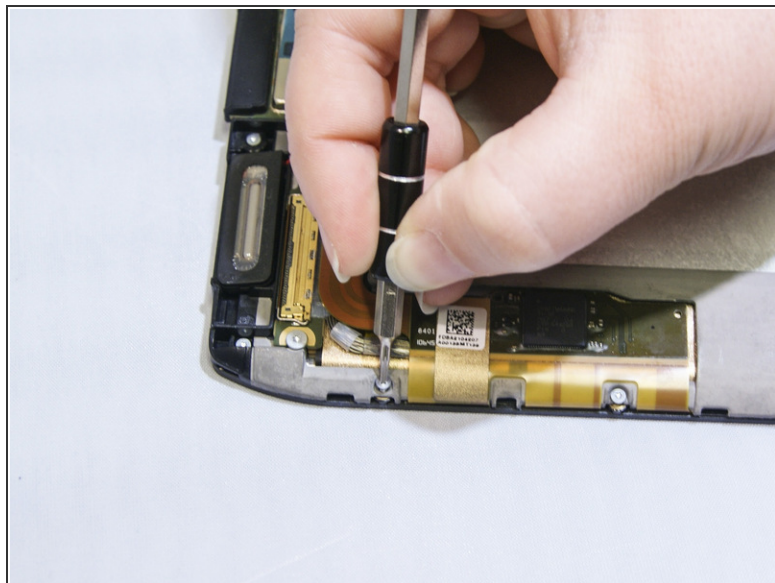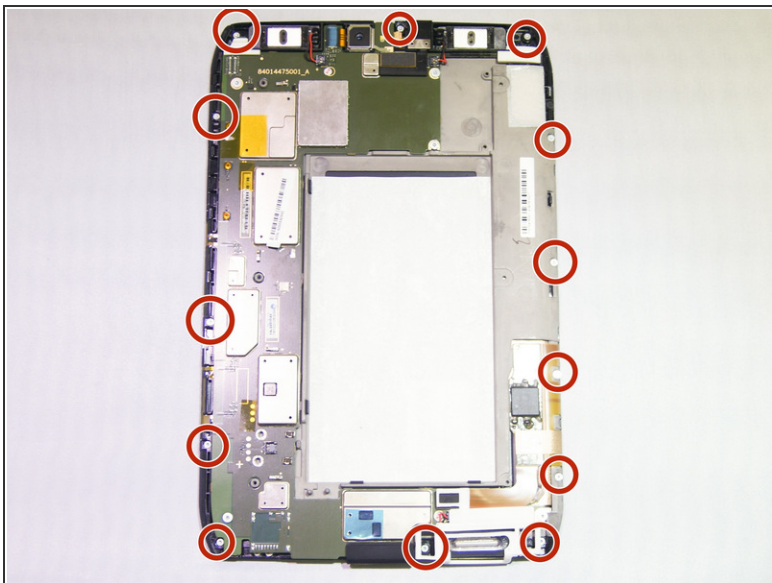

- Remove thirteen 2.55mm Torx #4 screws with Torx T4 screwdriver.




## Step 5

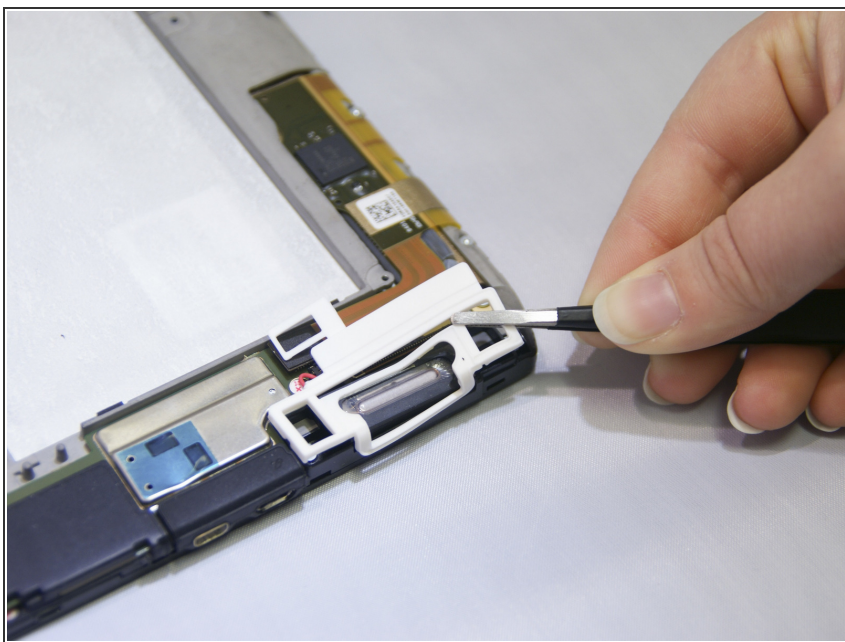

- Use tweezers to pull up the white rubber cover.





## Step 6

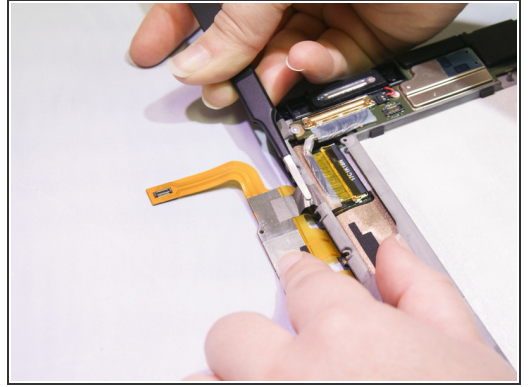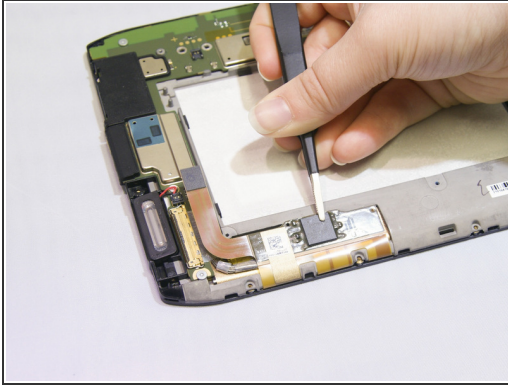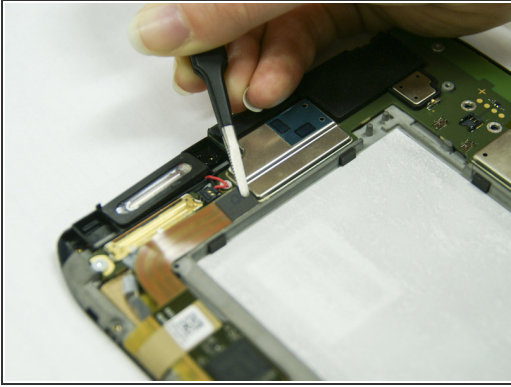



- Use the tweezers to pull up the small chip from its receiver.
- Use the tweezers to pull up the larger chip from its receiver.
- ⓘ There is adhesive attached to the back of the larger chip on the touchscreen controller strip.
- Use the tweezers to pull up one end of the small piece of tape that is holding the touchscreen controller.

## Step 7

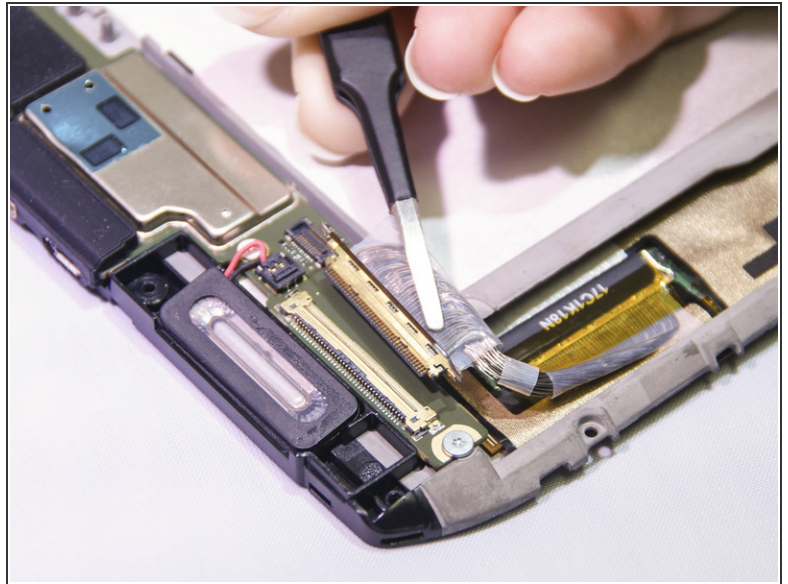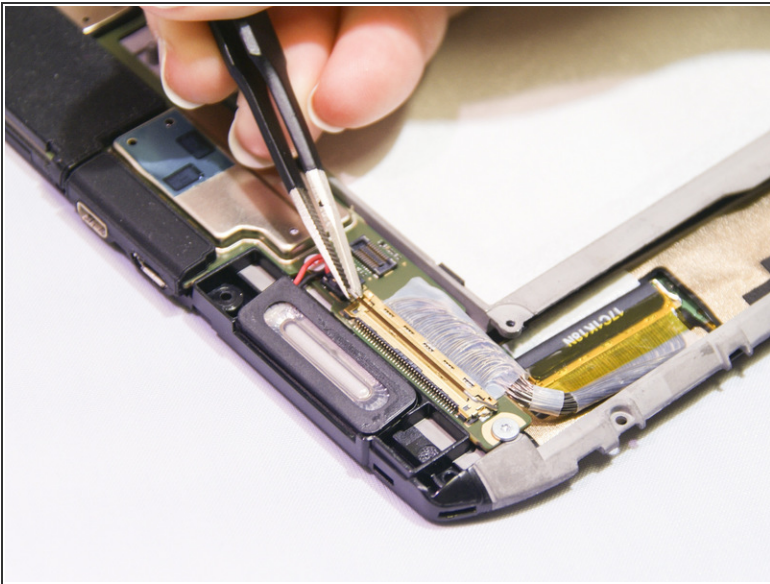

- Use the tweezers to pull up and release the thin handle that is attached to the LCD connector.
- Use the tweezers to pull out the LCD connector from its receptor.

## Step 8

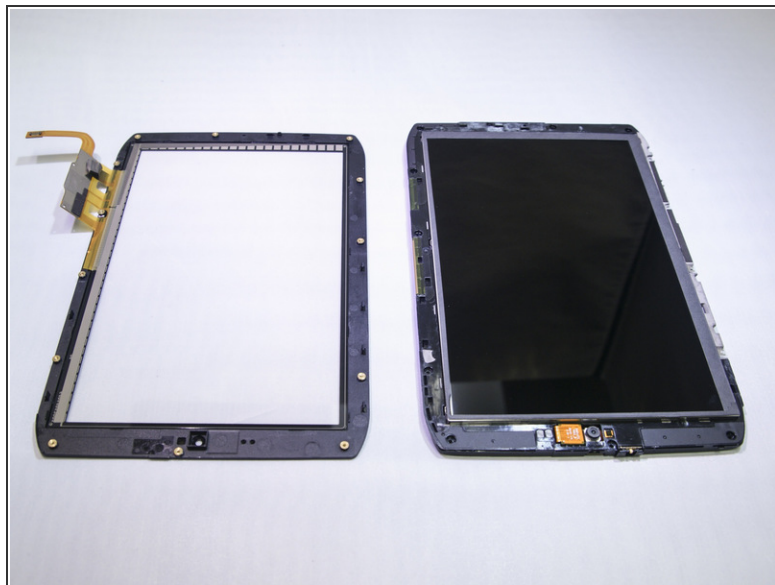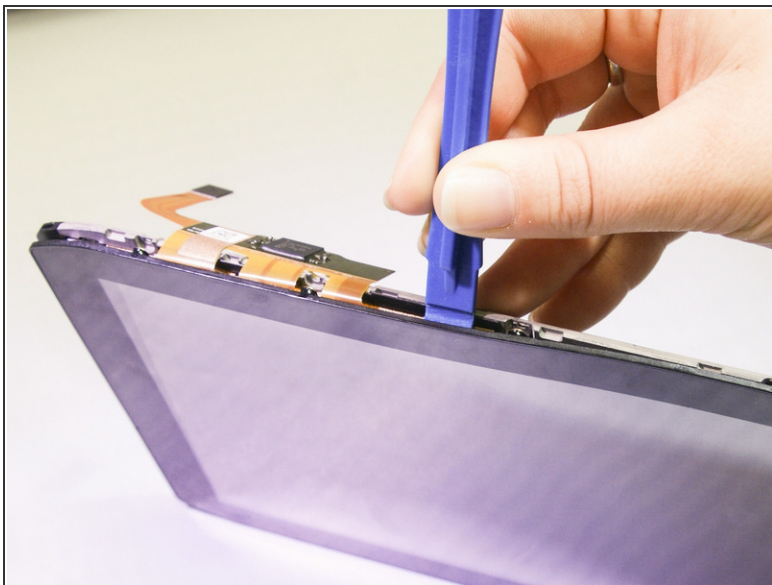

- Use a plastic opening tool to gradually separate the screen from the device.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-07-11 12:21:55 PM.